


# EVOLine®

the e-place design



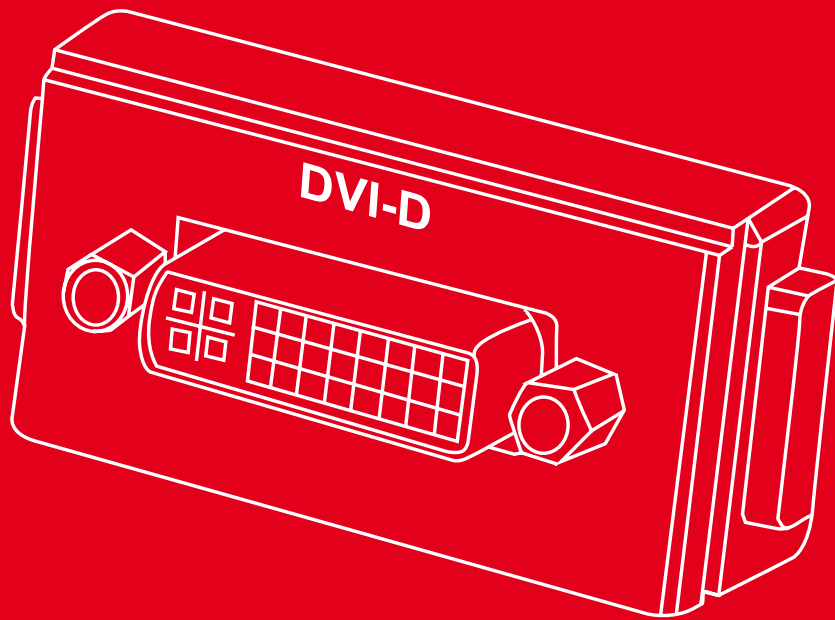

EVOline® Multimedia Modules



**EVoline® VGA cable**  
**EVoline® DVI-A cable**

**EVoline® VGA cable**  
**5 x BNC adapter**

**EVoline® DVI-D cable**

**EVoline® HDMI cable**

**Cable properties**

				
Flame retardant	self extinguishing	self extinguishing		VW-1
Halogen free	yes	yes	yes	yes
Colour	Black	Black	Black	
Outer diameter	7,2 mm Ø ± 0,3 mm	7,2 mm Ø ± 0,3 mm	6,2 mm Ø ± 0,19 mm	(3.00 ± 0,15)*(13.00 ± 0.30)mm
Bend radius	72 mm	72 mm	62 mm ± 0,19 mm	28 x 5M
Attenuation	f (MHz)      dB/100 m	f(MHz)      dB/100 m		f (MHz)      db/100 m
	100            14,5	100            14,5		
Resistance	75 Ω	75 Ω		100±10Ω
Transmission length	see matrix on page 288	see matrix on page 288	upto Approx. 15 m	ca. 25 m
Temperature	-20° bis 70° C	-20° bis 70° C		80°
Conductors/Coax	3	3		
Conductor section	3 x 0,51 mm Ø Cu-wire	3 x 0,51 mm Ø Cu-wire	28 AWG	
Insulation	Natural colour with identification threads: Red, Green, Black	Natural colour with identification threads: Red, Green, Black		
Shielding	Single Copper braid	Single Copper braid	foil + braid	
Single core	1	1		
Conductor section	1 x 0,4 mm Ø verz. Cu-wire	1 x 0,4 mm Ø verz.Cu-wire		
Insulation	Natural colour with identification threads: yellow	Natural colour with identification threads: yellow		
Shielding	metal laminated foil	metal laminated foil		
Cores	6	6	twisted pair	
Leads	2 x 3 x 0,08 mm Ø verz. Cu-braid	2 x 3 x 0,08 mm Ø verz. Cu-braid	4 x 0,38 mm, 5 x 0,127 mm	

Very high quality cable, that by its construction, transfers the bandwidth (Frequency) of the entire VGA mode. Three 75 Ω Coaxial cores, the RGB signals with no visible Propagation delays transferred. Six control cores are under others for transmission of the DDC mode and the hardware detect. High transmission quality is ensured by extremely low attenuation structure of the Coaxial cores, combined with a optimal synchronization factor. Optimal sizing of cables for H-/V-Synchronous impulses. Flame retardant and halogen free. Cable meets the Requirement of public authority and industry.

Highgrade twisted pair Cable, built for the DVI-D Transmission in the single-link. Five control cores are under others, to transfer the DDC mode and the hardware detect.






Optimized shielding guarantees high transmission quality. Flexible cable optimized for Multi-Media applications.








Article	Picture	Specification	Type
<p><b>VGA Connector, 15-pole HDD socket</b> with screw connector, Halogen free and flame retardant Impedance of 75 Ohm, low damping factors Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 0810 0000</p> <p>9330 4040 0000</p>
<p>Fits profile: 1,2,5,6</p>			
<p><b>VGA Connector, 15-pole HDD socket</b> Angular outlet with label field with screw connector, Halogen free and flame retardant, Impedance of 75 Ohm, low damping factors Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 2370 0000</p> <p>9330 4140 0000</p>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>VGA Connector, 15-pole HDD socket</b> on 5 x BNC RGB HV plug with screw connector, Halogen free and flame retardant, Impedance of 75 Ohm, low damping factors Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* on 5 x BNC (RGB HV) plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 1560 0000</p> <p>9330 4040 0000</p>
<p>Fits profile: 1,2,5,6</p>			
<p><b>VGA Connector, 15-pole HDD socket on 5 x BNC RGB HV</b> Angular outlet with label field with screw connector, Halogen free and flame retardant, Impedance of 75 Ohm, low damping factors Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* on 5 x BNC (RGB HV) plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 2380 0000</p> <p>9330 4140 0000</p>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>DVI-A Connector, 9 + 5-pole, DVI socket (analog)</b> low damping factors Cable Halogen free and flame retardant Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 0860 0000</p> <p>9330 9700 0000</p>
<p>Fits profile: 1,2,5,6</p>			

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

# EVOLine® Multimedia Modules

Article	Picture	Specification	Type
<b>DVI-A Connector, 9 + 5-pole, DVI socket (analog)</b> Angular outlet with label field low damping factors Cable Halogen free and flame retardant Installation dimension: 50 x 50 mm Fits profile: 2,3,4,5,6,7,8,9		with 3,0 m cable* and plug	<b>9330 2420 0000</b>
		Cable extension ordered separately without solder splices	<b>9330 9710 0000</b>
<b>DVI-D Connector, 18-pole, DVI socket (digital) Single-Link</b> low damping factors Cable Halogen free and flame retardant Installation dimension: 25 x 50 mm  Fits profile: 1,2,5,6		with 3,0 m cable* and plug	<b>9330 0850 0000</b>
		Cable extension ordered separately without solder splices	<b>9330 9700 0000</b>
<b>DVI-D Connector, 18-pole, DVI socket (digital) Single-Link</b> Angular outlet with label field low damping factors Cable Halogen free and flame retardant Installation dimension: 50 x 50 mm  Fits profile: 2,3,4,5,6,7,8,9		with 3,0 m cable * and plug	<b>9330 2410 0000</b>
		Cable extension ordered separately without solder splices	<b>9330 9710 0000</b>
<b>HDMI 1.3 Connector, HDMI socket</b> with Gold plated contacts for connecting HDMI connector cable optimal performance with high end Gold plated plug Transmission length to ca. 25 m Installation dimension: 25 x 50 mm  Fits profile: 1,2,5,6		with 0,2 m cable* and socket	<b>9330 6060 0000</b>
		with 3,0 m cable* and plug	<b>9330 6070 0000</b>
		Cable extension ordered separately	
<b>HDMI 1.3 Connector, HDMI socket</b> Angular outlet with label field with Gold plated contacts optimal performance with high end Gold plated plug Transmission length to ca. 25 m Installation dimension: 50 x 50 mm  Fits profile: 2,3,4,5,6,7,8,9		with 0,2 m cable* and socket	<b>9330 6080 0000</b>
		with 3,0 m cable* and plug	<b>9330 6090 0000</b>
		Cable extension ordered separately	

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.





Article	Picture	Specification	Type
<p><b>Video Connector, Composite Video (RCA) and S-Video (4-pole MINI-DIN) socket</b> with high end Gold plated plug, 75 Ohm impedance at low damping factors Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 0820 0000</b></p> <p><b>9330 4050 0000</b></p>
<p>Fits profile: 1,2,5,6</p>			
<p><b>Video Connector, Composite Video (RCA) and S-Video (4-pole MINI-DIN) socket</b> Angular outlet with label field with high end Gold plated plug, 75 Ohm impedance at low damping factors Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 2470 0000</b></p> <p><b>9330 4150 0000</b></p>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>Video Connector, Composite Video (RCA) socket</b> with high end Gold plated plug, 75 Ohm impedance at low damping factors Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and pug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 0890 0000</b></p> <p><b>9330 4070 0000</b></p>
<p>Fits profile: 1,2,5,6</p>			
<p><b>Video Connector, Composite Video (RCA) socket</b> Angular outlet with label field with high end Gold plated plug, 75 Ohm impedance at low damping factors Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 2480 0000</b></p> <p><b>9330 4170 0000</b></p>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>Video Connector, S-Video (4-pole MINI-DIN) socket</b> with high end Gold plated plug, 75 Ohm impedance at low damping factors Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 0900 0000</b></p> <p><b>9330 4060 0000</b></p>
<p>Fits profile: 1,5,6</p>			

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

# EVOLine® Multimedia Modules

Article	Picture	Specification	Type
<p><b>Video Connector, S-Video (4-pole MINI-DIN) socket</b> Angular outlet with label field with high end Gold plated plug, 75 Ohm Impedance at low damping factors Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* each and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 2490 0000</p> <p>9330 4160 0000</p>
<p><b>Video Connector, Component Video 3 x socket (RCA)</b> Y, PB, PR, Green, Blue, Red 75 Ohm impedance at low damping factors Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plugs</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 8010 0000</p> <p>9331 0510 0000</p>
<p><b>Video Connector, Component Video 3 x socket (RCA)</b> Y, PB, PR, Green, Blue, Red Angular outlet with label field with high end Gold plated plug, 75 Ohm impedance at low damping factors Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* and plugs</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 8020 0000</p> <p>9331 0520 0000</p>
<p><b>Audio Connector,</b> 1 x Stereo jack socket 3,5 mm with high end Gold plated plug Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 0910 0000</p> <p>9330 4100 0000</p>
<p><b>Audio Connector,</b> 1 x Stereo jack socket 3,5 mm Angular outlet with label field with high end Gold plated plug Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p>9330 2460 0000</p> <p>9330 4200 0000</p>

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

Article	Picture	Specification	Type
<p><b>Audio Connector,</b>  <b>2 x Stereo jack socket 3,5 mm</b>                      with high end Gold plated plug                      Installation dimension: 25 x 50 mm</p> <p>Fits profile:                      1,2,5,6</p>		with 3,0 m cable* each and plug Cable extension ordered separately without solder splices	<p><b>9330 0840 0000</b></p> <p><b>9330 4090 0000</b></p>
<p><b>Audio Connector,</b>  <b>2 x Stereo jack socket 3,5 mm</b>                      Angular outlet with label field                      with high end Gold plated plug                      Installation dimension: 50 x 50 mm</p> <p>Fits profile:                      2,3,4,5,6,7,8,9</p>		with 3,0 m cable* and plug Cable extension ordered separately without solder splices	<p><b>9330 2450 0000</b></p> <p><b>9330 4190 0000</b></p>
<p><b>Audio Connector, professional,</b>  <b>XLR socket wired symmetrically</b>                      with high end Gold plated plug                      Installation dimension: 50 x 50 mm</p> <p>Fits profile:                      1,2,5,6</p>		with 3,0 m cable * and plug Cable extension ordered separately without solder splices	<p><b>9330 3880 0000</b></p> <p><b>9330 9820 0000</b></p>
<p><b>Audio Connector, professional,</b>  <b>XLR socket wired symmetrically</b>                      Angular                      with high end Gold plated plug                      Installation dimension: 75 x 50 mm</p> <p>Fits profile:                      2,3,4,5,6,7,8,9</p>		with 3,0 m cable* and plug Cable extension ordered separately without solder splices	<p><b>9330 6050 0000</b></p> <p><b>9330 9830 0000</b></p>

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

# EVOLine® Multimedia Modules





Article	Picture	Specification	Type
<p><b>Audio Connector,</b>  <b>Stereo 2 x RCA socket L / R</b>                      with high end Gold plated plug                      Installation dimension: 25 x 50 mm</p>		with 3,0 m cable* and plug Cable extension ordered separately without solder splices	9330 0830 0000 9330 4080 0000
<p>Fits profile:                      1,2,5,6</p>			
<p><b>Audio Connector,</b>  <b>Stereo 2 x RCA socket L / R</b>                      Angular outlet with label field                      with high end Gold plated plug                      Installation dimension: 50 x 50 mm</p>		with 3,0 m cable* and plug Cable extension ordered separately without solder splices	9330 2440 0000 9330 4180 0000
<p>Fits profile:                      2,3,4,5,6,7,8,9</p>			
<p><b>Serial Connector</b>  <b>D-SUB socket 9-pole,</b>                      with screw connector, Halogen free                      and flame retardant,                      flexible connector cable                      Installation dimension: 25 x 50 mm</p>		with 3,0 m cable* and socket Cable extension ordered separately without solder splices	9330 0870 0000 9330 4130 0000
<p>Fits profile:                      1,2,5,6</p>			
<p><b>Serial Connector</b>  <b>D-SUB socket 9-pole,</b>                      Angular outlet with label field                      with screw connector, Halogen free                      and flame retardant,                      flexible connector cable                      Installation dimension: 50 x 50 mm</p>		with 3,0 m cable* and socket Cable extension ordered separately without solder splices	9330 2390 0000 9330 4230 0000
<p>Fits profile:                      2,3,4,5,6,7,8,9</p>			
<p><b>Data Connector</b>  <b>one USB 2.0, Type A, socket</b>                      to connect standard                      USB - devices                      Installation dimension: 25 x 50 mm</p>		with 3,0 m USB cable and plug Type A Cable extension ordered separately	9330 1040 0000
<p>Fits profile:                      1,2,5,6</p>			

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.






Article	Picture	Specification	Type
<p><b>Data Connector one USB 2.0, Type A, socket</b> Angular outlet with label field to connect standard USB - devices Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>with 3,0 m USB cable* and plug type A</p> <p>Cable extension ordered separately</p>	<b>9330 2430 0000</b>
<p><b>Data Connector two USB 2.0, Type A, socket</b> Angular outlet with label field to connect standard USB - devices Installation dimension: 50 x 50 mm</p> <p>Fits profile: 3,4,5,6,7,8,9</p>		<p>each with a 3,0 m USB cable* and plug type A</p> <p>2 x Cable extension ordered separately</p>	<b>9330 6170 0000</b>
<p><b>Data Connector three USB 2.0, Type A, socket</b> Angular outlet with label field to connect standard USB - devices Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>each with a 3,0 m USB cable* and plug Type A</p> <p>3 x Cable extension ordered separately</p>	<b>9330 7460 0000</b>
<p><b>Data Connector 4-port USB active hub, USB 2.0</b> Four USB inputs, one USB output All ports support high-speed (480Mbps), Full speed (12Mbps) and Low speed (1.5 Mbps), Meets the USB 2.0 specification. External power supply for active power to the connected USB devices. Supports Plug and Play and hot swap. Equipped with detection and protection against overvoltage Network connector Cable 1.3 m Operating Systems: Win 98/98SE/ME/2000 / XP/VISTA/MacOS8.6 and higher Installation dimension: 100 x 50 mm</p> <p>Fits profile: 1</p>		<p>each with a 3,0 m USB cable* and plug Type A</p> <p>Cable extension ordered separately</p>	<b>9330 5950 0000</b>

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

# EVOLine® Multimedia Modules

Article	Picture	Specification	Type
<p><b>Data Connector</b>  <b>2 x 4-port USB active hub, USB 2.0</b>            2 x four USB inputs, one USB output            All ports support high-speed (480 Mbps), Full Speed (12 Mbps) and Low Speed (1.5 Mbps), Meets The USB 2.0 specification.            2 x external power supply for active power of the connected USB devices.            Supports Plug and Play and Hot swap.            Equipped with detection and Protection against overvoltage            2 x power connector Cable 1.3 m            Operating Systems:            Win 98/98SE/ME/2000 / XP/VISTA/MacOS8.6 and higher            Installation dimension: 100 x 50 mm</p>		<p>each with a 3,0 m USB cable* and plug type A</p> <p>2 x cable extension ordered separately</p>	<p><b>9330 5960 0000</b></p>
<p>Fits profile: 1</p>			
<p><b>VGA Audio Connector</b>  <b>VGA Connector, 15-pole HDD socket</b>            with screw connector, Halogen free            75 Ohm impedance,            low damping factors            stereo jack socket 3,5 mm,            with high end Gold plated plug            Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 7920 0000</b></p> <p><b>9331 0470 0000</b></p>
<p>Fits profile: 1,2,5,6</p>			
<p><b>Audio-Video Connector,</b>  <b>stereo jack socket 3,5 mm,</b>  <b>S-Video (4-pole MINI-DIN) socket</b>            Angular outlet with label field            with high end Gold plated plug,            75 Ohm impedance at low damping factors            Installation dimension: 50 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 6860 0000</b></p> <p><b>9331 0460 0000</b></p>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>Audio-Video Connector,</b>  <b>stereo jack socket 3,5 mm,</b>  <b>Composite Video (RCA) socket</b>            with high end Gold plated plug,            75 Ohm impedance at low damping factors            Installation dimension: 25 x 50 mm</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 6970 0000</b></p> <p><b>9331 0430 0000</b></p>
<p>Fits profile: 1,2,5,6</p>			

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

Article	Picture	Specification	Type
<p><b>Audio-Video Connector, stereo jack socket 3,5 mm Composite Video (RCA) socket</b> with high end Gold plated plug, 75 Ohm impedance at low damping factors Angular outlet with label field Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 6890 0000</b></p> <p><b>9331 0440 0000</b></p>
<p><b>Audio-Video Connector, stereo 2 x RCA socket L / R Composite Video (RCA) socket</b> with high end Gold plated plug, 75 Ohm impedance at low damping factors Angular outlet with label field Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 7480 0000</b></p> <p><b>9331 0530 0000</b></p>
<p><b>Audio-Video Connector, Stereo 2 x RCA socket L / R S-Video (4-pole MINI-DIN) socket</b> 75 Ohm impedance at low damping factors Angular outlet with label field Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9330 7930 0000</b></p> <p><b>9331 0450 0000</b></p>
<p><b>Audio-Connector with switch normally open, 1-pole Series 18, (eao)</b> Switching capacity max. 42 VDC, 100 mA Lens size: 14 x 14 mm Lens colour: Grey Stereo jack socket 3.5 mm with high end Gold plated plug optimal performance Angular outlet with label field Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>Audio with 3,0 m cable* and plug</p> <p>Cable extension ordered separately</p> <p>without solder splices</p>	<p><b>9331 0480 0000</b></p> <p><b>9331 0490 0000</b></p>
<p><b>Audio-Daten Connector, Stereo Jack socket 3,5 mm with high end Gold plated plug Telephone-/data socket (Reichle Et De-Massari)</b> Snap In Angular outlet with label field Installation dimension: 50 x 50 mm</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		<p>Audio and RJ45 CAT5e shielded, with 3,0 m Cable* and plug</p> <p>Audio and RJ45 CAT6 shielded, with 3,0 m Cable* and plug</p> <p>Cable extension ordered separately</p>	<p><b>9330 6360 0000</b></p> <p><b>9330 7610 0000</b></p>






\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

# EVOline® Multimedia Modules

Article	Picture	Specification	Type
<p><b>Audio-Data Connector, Stereo jack socket 3,5 mm</b> with high end Gold plated plug <b>modular-adapter</b> (Elbro) RJ45 on RJ45, 1:1 interconnected RJ45 CAT6 shielded Angular outlet with label field Installation dimension: 50 x 50 mm</p>		<p>Audio, with 3,0 m cable* and plug</p> <p>Cable extension ordered separately without solder splices</p>	<p><b>9330 7800 0000</b></p> <p><b>9331 0500 0000</b></p>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>TV Connector</b> Coaxial 75 Ohm Shielding &gt; 90 dB Angular outlet with label field Installation dimension: 50 x 50 mm</p>		<p>with 2,5 m cable* plug/socket</p>	<b>9330 7590 0000</b>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			
<p><b>TV-Radio Connector</b> Coaxial 75 Ohm Shielding &gt; 90 dB Installation dimension: 50 x 50 mm</p> <p>TV = plug Radio = socket</p>		<p>with 2,5 m cable* plug/socket</p>	<b>9330 6320 0000</b>
<p>Fits profile: 1,2,5,6</p>			
<p><b>TV-Radio Connector</b> Coaxial 75 Ohm Shielding &gt; 90 dB Angular outlet with label field Installation dimension: 50 x 50 mm</p> <p>TV = plug Radio = socket</p>		<p>with 2,5 m cable* plug/socket</p>	<b>9330 6330 0000</b>
<p>Fits profile: 2,3,4,5,6,7,8,9</p>			

**Special combinations  
on request.**

\* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

Article	Picture	Specification	Type
<p><b>FM Radio Module</b></p> <ul style="list-style-type: none"> <li>- UKW Radio mono with remote control</li> <li>- Autoscan function</li> <li>- Direct frequency input possible</li> <li>- 9 stations presetable</li> <li>- Confirmation beep (Optional: high / low / off) when pressed</li> <li>- Switch on operating voltage programmable</li> <li>- Operation indication via LED</li> <li>- 2 EVOLine® speaker modules connectable.</li> </ul> <p>Installation dimension: 150 x 50 mm Fits profile: 1,2,5,9</p>		<p>Technical data: Supply voltage: 230 V ~ / 50 Hz Output power: 1.3 W Frequency range: FM 87.5-108 MHz Frequency response: 40 Hz to 15 kHz Speaker impedance:&gt; 4 Ohm</p>	Black <b>9330 6430 0000</b>
<p><b>FM Radio Module</b></p> <ul style="list-style-type: none"> <li>- UKW Radio mono with Remote control</li> <li>- Autoscan function</li> <li>- Direct frequency input possible</li> <li>- 9 stations presetable</li> <li>- Confirmation beep (Optional: high / low / off) when pressed</li> <li>- Switch on operating voltage programmable</li> <li>- Operation indication via LED</li> <li>- 2 EVOLine® speaker modules connectable.</li> </ul> <p>Installation dimension: 150 x 50 mm Fits profile: 1,2,5,9</p>		<p>Technical data: Supply voltage: 230 V ~ / 50 Hz Output power: 1.3 W Frequency range: FM 87.5-108 MHz Frequency response: 40 Hz to 15 kHz Speaker impedance:&gt; 4 Ohm</p>	Stainless Steel lacquered (ALANOX®) <b>9330 8090 0000</b>
<p><b>Remote control supplied with FM radio module</b></p>			Silver / Black
<p><b>Speaker Module</b></p> <p>two full-range speakers with high efficiency and wide angle output for playback of voice and music in conjunction with iPod *, iPhone * and radio module Installation dimension: 100 x 50 mm</p>		<p>Technical data: Power handling: 3 / 4 W Impedance: 8 Ohm Frequency response (-3 dB): 240-13 kHz Noise Level: 1W/1m: 79 dB at 3 W: 83 dB Resonance frequency: 260 Hz</p>	Black <b>9330 6440 0000</b>
Fits profile: 1,2,5,9			
<p><b>Speaker Module</b></p> <p>two full-range speakers with high efficiency and wide angle output for playback of voice and music in conjunction with iPod *, iPhone * and radio module Installation dimension: 100 x 50 mm</p>		<p>Technical data: Power handling: 3 / 4 W Impedance: 8 Ohm Frequency response (-3 dB): 240-13 kHz Noise Level: 1W/1m: 79 dB at 3 W: 83 dB Resonance frequency: 260 Hz</p>	Stainless Steel lacquered (ALANOX®) <b>9330 8100 0000</b>
Fits profile: 1,2,5,9			

\* TM Apple Computer, Inc.

# EVOLine® Multimedia Modules

## Article

### iPod® / iPhone® Module

- Stereo amplifier and charging function for portable music players from the Apple I-Series e.g. Apple iPod® and Apple iPhone®.
- Integrated buttons for volume control and AUX on / off.
- Built-in infrared receiver for optional remote control with features:
  - Volume, Play / Stop and Skip
- AUX input with 3.5 mm mini-stereo jack for external audio source e.g. MP3 player.
- Can be combined with the EVOLine® speaker modules or other high quality speakers (Not included).
- With the optional stereo line-
  - Output can be configured for multiroom systems.

Installation dimension: 75 x 50 mm

Fits profile: 1

## Picture



## Specification

Technical data:  
 Input voltage: 200 mV Line  
 Input impedance: 47 Ohm Line  
 Output voltage: max. 3,5 V  
 Output impedance: 8 Ohm  
 Power rating: 2 x 1,5 W  
 Operating voltage: 230 V ~

Black

## Type

9330 6450 0000

Optional:  
 Remote control  
 Stereo line-out output

Delivery without iPod®

### iPod® / iPhone® Module

- Stereo amplifier and charging function for portable music players from the Apple I-Series e.g. Apple iPod® and Apple iPhone®.
- Integrated buttons for volume control and AUX on / off.
- Built-in infrared receiver for optional remote control with features:
  - Volume, Play / Stop and Skip
- AUX input with 3.5 mm mini-Stereo jack for external audio source e.g. MP3 player.
- Can be combined with the EVOLine® Speaker modules or other high quality speakers (Not included).
- With the optional stereo line-
  - Output can be configured for multiroom systems.

Installation dimension: 75 x 50 mm

Fits profile: 1



Technical data:  
 Input voltage: 200 mV Line  
 Input impedance: 47 Ohm Line  
 Output voltage: max. 3,5 V  
 Output impedance: 8 Ohm  
 Power rating: 2 x 1,5 W  
 Operating voltage: 230 V ~

Stainless Steel lacquered (ALANOX®)

9330 8110 0000

Optional:  
 Remote control  
 Stereo line-out output

Delivery without iPod®

### Remote control iPod® / iPhone® module

White



9331 0580 0000

Schulte Elektrotechnik  
GmbH & Co. KG

Postfach 2732/2708  
D-58477 Lüdenscheid

Jüngerstraße 21  
D-58515 Lüdenscheid

Telefon +49 (0) 23 51 / 94 81-0  
Telefax +49 (0) 23 51 / 4 26 58  
E-mail [info@schulte.com](mailto:info@schulte.com)

[www.schulte.com](http://www.schulte.com)



[www.schulte.com](http://www.schulte.com)

6040 0510 1000