


EVOLine®




the e-place design



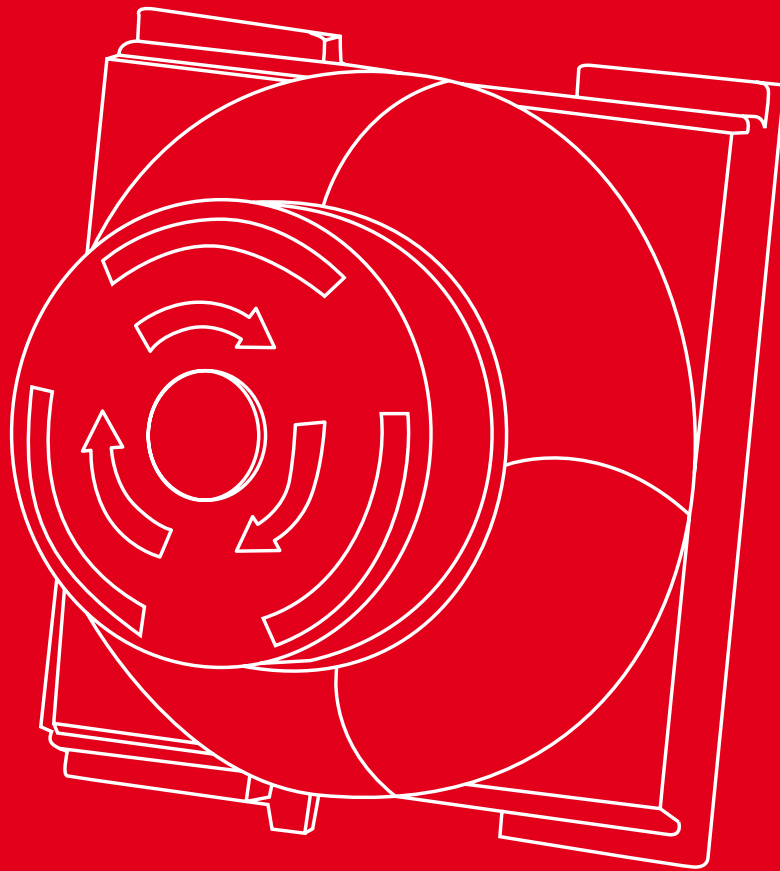

EVoline® Switch and Pushbutton Modules






Article	Picture	Specification	Type
<p>ON / OFF switch, 230 V~Blue illuminated with lamp symbol for switching of external lighting installation dimensions: 50 x 50 mm</p>			<p>9330 6650 0000</p>
<p>Fits profile: 1,2,9</p>			<p>9330 6660 0000</p>
<p>ON / OFF switch, 230 V~Blue illuminated with lamp symbol for switching of external lighting installation dimensions: 50 x 50 mm</p>	<p>Fits profile: 3,5</p>		
<p>ON / OFF switch, 230 V~Blue illuminated Installation dimensions: 50 x 50 mm Can be used for a variety of functions e.g. switching installed sockets, switching design lighting, switching external sources via power exit cable and more.</p>			<p>9330 0010 0000</p>
<p>Fits profile: 1,2,3,4,5,6,7,8,9</p>			

EVoline® Switch and Pushbutton Modules

Article	Picture	Specification	Type
<p>Pushbutton, 1-fold as shutter, 1pole series 18, (eao) switching performance max. 42 V AC/DC, 100 mA size of pressure cap: 14 x 14 mm colour pressure cap: Grey installation dimensions: 25 x 50 mm</p> <p>Black</p> <p>Fits profile: 1,2,3,4,5,6,7,8,9</p>		with 3.0 m cable without plug	9330 6120 0000
<p>Pushbutton, 2-fold as shutter, 1pole series 18, (eao) switching performance max. 42 V AC/DC, 100 mA size of pressure cap: 14 x 14 mm colour pressure cap: Grey installation dimensions: 25 x 50 mm</p> <p>Black</p> <p>Fits profile: 1,2,3,4,5,6,7,8,9</p>		with 3.0 m cable without plug	9330 6460 0000
<p>Pushbutton, 4-fold as shutter, 1pole series 18, (eao) switching performance max. 42 V AC/DC, 100 mA size of pressure cap: 14 x 14 mm colour pressure cap: Grey installation dimensions: 50 x 50 mm</p> <p>Black</p> <p>Fits profile: 1,2,3,4,5,6,7,8,9</p>		with 3.0 m cable without plug	9330 6470 0000
<p>Pushbutton, 1-fold as shutter, 1pole angular outlet with inscription field series 18, (eao) switching performance max. 42 V AC/DC, 100 mA size of pressure cap: 14 x 14 mm colour pressure cap: Grey installation dimensions: 50 x 50 mm</p> <p>Black</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		with 3.0 m cable without plug	9330 7170 0000
<p>Pushbutton, 2-fold as shutter, 1 pole angular outlet with inscription field series 18, (eao) switching performance max. 42 V AC/DC, 100 mA size of pressure cap: 14 x 14 mm colour pressure cap: Grey installation dimensions: 50 x 50 mm</p> <p>Black</p> <p>Fits profile: 2,3,4,5,6,7,8,9</p>		with 3.0 m cable without plug	9330 7180 0000

* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.

Article	Picture	Specification	Type
<p>Master/Slave Electronic for switching of downstream sockets (slave sockets). Can be ordered only with upstream master and downstream slave socket (colours optional, see page 202), plastic plate: Black, installation dimensions: 75 x 50 mm</p> <p>Fits profile: 1,2,3,4,5,6,7,8,9</p>		<p>switching threshold: 20 up to 100 mA adjustable, nominal voltage: 250 V nominal current: 16 A Pole-number: 2 pole with earthing contact safety provision: IP20 Slave-switching: 2pole</p>	<p>9330 6160 0000</p>
<p>Emergency stop button with protection collar and imprint (eao) (EMERGENCY STOP) overload safe EN IEC 60947-5-5 turn unlock clockwise illumination: LED Red illuminated, 12V DC external mushroom pressure cap: plastic Red elevated installation frontform: round installation dimensions: 50 x 50 mm</p> <p>Fits profile: 1,2,5,9</p>		<p>Contacts: 2 opener switching function: snap-in function switching system: push button switch power acceptance: 9.7 up to 12.4 mA switching performance: 250 V AC, 5 A</p> <p>with 3.0 m cable without plug</p>	<p>9330 6270 0000</p>
<p>Key holder with 2 keys (eao) 2 Key positions Position A: basic Position C: snap-in function standard lock 1001 front: plastic Black installation: elevated installation frontform: round frontring: Aluminium nature installation dimensions: 50 x 50 mm</p> <p>Fits profile: 1,2,3,5,9</p>		<p>Key pull-out: position C + A switching function: snap-in function switching system: jumping switch element switching performance: 250 V AC, 5 A</p> <p>with 3.0 m cable without plug</p>	<p>9330 6280 0000</p>

* Cable length measured from the position of the connection field inside the profile. Other cable lengths per meter on request.



Schulte Elektrotechnik
GmbH & Co. KG

Postfach 2732/2708
D-58477 Lüdenscheid

Jüngerstraße 21
D-58515 Lüdenscheid

Telefon +49 (0) 23 51 / 94 81-0
Telefax +49 (0) 23 51 / 4 26 58
E-mail info@schulte.com

www.schulte.com



www.schulte.com

6040 0510 1000